


Data sheet 211080 Fuel Hose NBR

[back](#)

ContiTech Schlauch GmbH

Segment: Fuel

Search date: 17.11.2004

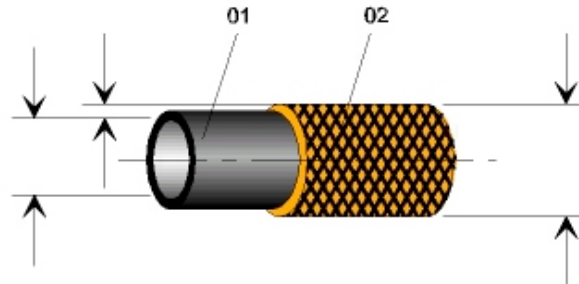

lfd. Nr.	Construction	Material	Remarks
1	tube	NBR	
2	reinforcement	CO or CMD	braided textile cover impregnated in grey or black

Application areas:

usable for the following fuels
 - Gasoline
 - Diesel

Features:

operating temperature: -35°C to +90°C, peak temperature +110°C

Tips:

for industrial and replacement parts applications
 marking according to customers requirements
 specified dimensions are examples only
 further dimensions available upon request

ID Ø [mm]	OA Ø [mm]	wall thick- ness S [mm]	min bend radius [mm]	max working pressure [bar]	proof pressure [bar]
3.20	7.00	1.90	26	5	8
3.50	7.50	2.00	26	5	8
4.00	8.00	2.00	32	5	8
4.50	9.50	2.50	34	5	8
5.00	10.00	2.50	40	5	8
5.50	10.50	2.50	42	5	8
6.00	10.00	2.00	48	5	8
6.00	11.00	2.50	48	5	8
7.00	12.00	2.50	56	5	8
7.50	12.50	2.50	58	5	8
8.00	13.00	2.50	65	5	8
9.00	15.00	3.00	72	5	8
10.00	15.00	2.50	80	5	8
11.00	17.00	3.00	88	5	8
12.00	17.00	2.50	95	5	8

12.00	18.00	3.00	96	5	8
13.00	18.00	2.50	96	5	8
14.00	19.00	2.50	104	5	8
14.00	20.00	3.00	104	5	8
17.00	22.00	2.50	104	5	8