


Data sheet 213530 Fuel Hose NBR / CR

[back](#)

ContiTech Schlauch GmbH

Segment: Fuel

Search date: 18.11.2004

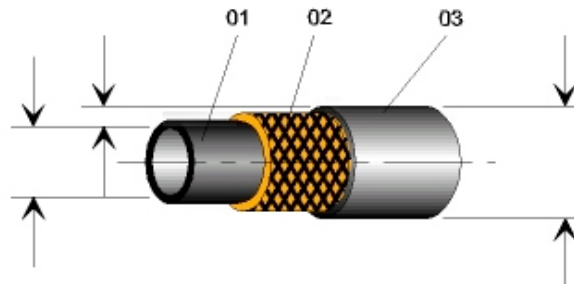

lfd. Nr.	Construction	Material	Remarks
1	tube	NBR	free of nitrosamine generating substances
2	reinforcement	CMD	
3	cover	CR	

Application areas:

usable for the following fuels
 - Gasoline
 - Diesel

Features:

operating temperature: -40°C to +90°C, peak temperature +110°C
 in relation to copper(deposit-free)
 good resistance against oil, ozone and acid

Tips:

design and performance profile corresponds to DIN 73 379 type 2A
 marking according to customers requirements
 specified dimensions are examples only
 further dimensions available upon request

ID Ø [mm]	OA Ø [mm]	wall thick- ness S [mm]	min bend radius [mm]	max working pressure [bar]	proof pressure [bar]
3.50	9.50	3.00	50	6	20
4.50	10.50	3.00	50	6	20
5.50	11.50	3.00	55	6	20
6.00	12.00	3.00	60	6	20
7.30	13.30	3.00	70	6	20
8.00	14.00	3.00	70	6	20
9.30	15.30	3.00	80	6	20
10.00	16.00	3.00	80	6	20
11.00	17.00	3.00	80	6	20
12.00	19.00	3.50	80	6	20
14.00	22.00	4.00	100	6	20